



## Using GMAIL to send emails from Hikvision™ recorder


To enable the device to send email using GMAIL we need to do the following settings. In the GMAIL account you need to go to My Account.

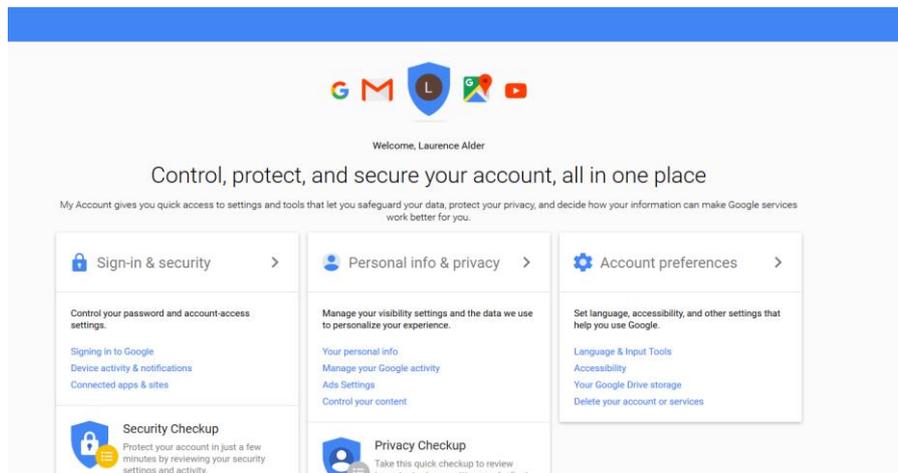

Go to Sign-in and Security and you need to enable “Two Step Verification”

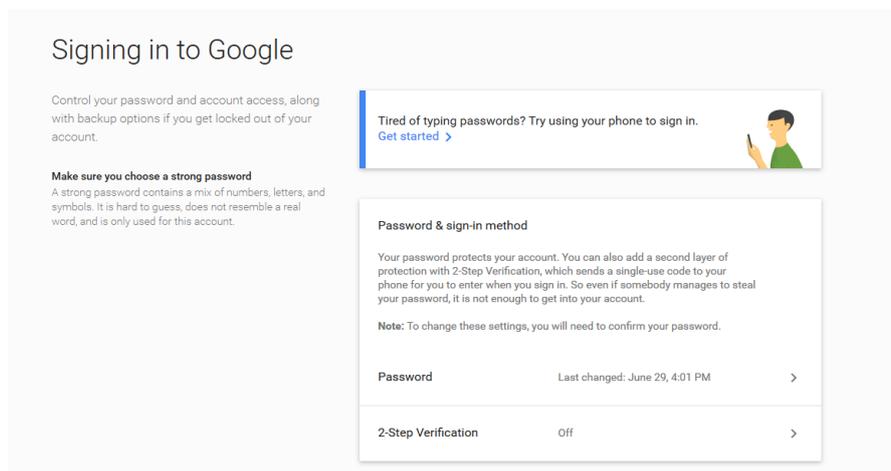

When this is enabled you should see “App Password”

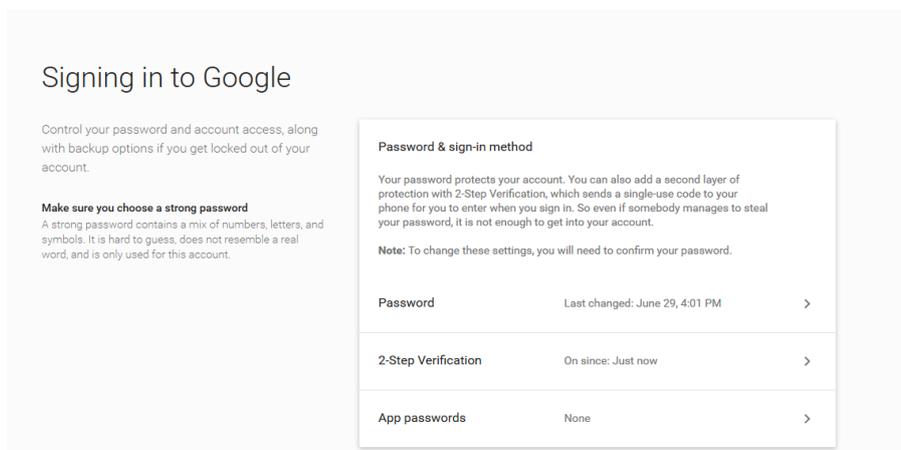

## Using GMAIL to send emails from Hikvision™ recorder

Click on this and you will need to create an app password. Select “Other (Custom name)” from the list and click generate. It will make a random password. Keep this safe for now, you will need this later on.

On the recorder you will need to go to Menu>Configuration>Network>Email.



The screenshot shows the 'Configuration' page with the 'Email' tab selected. The left sidebar has 'Network' expanded. The main content area shows the following settings:

General	PPPOE	DDNS	NTP	Email	SNMP	NAT	More Settings
Enable Se...	<input checked="" type="checkbox"/>			SMTP Ser...			
User Name				SMTP Port	0		
Password				Enable SSL/TSL	<input type="checkbox"/>		
Sender							
Sender's Address							
Select Receivers				Receiver 1			
Receiver							
Receiver's Address							
Enable Attached Picture				<input type="checkbox"/>			
Interval				2s			

You will need to enable “Sever Authentication”

In the Username enter you GMAIL address ([NAME@gmail.com](mailto:NAME@gmail.com))

In the password enter the app password you made earlier (16 digits)

The SMTP Server for GMAIL is “smtp.gmail.com”


The port number is either 587 or 25.

You will need to enable SSL/TLS.

In the Sender box you can enter any name.

In the senders address enter your GMAIL address.

In the receiver box you can enter a name and in the Receiver’s address you can add the receiving party’s email address.

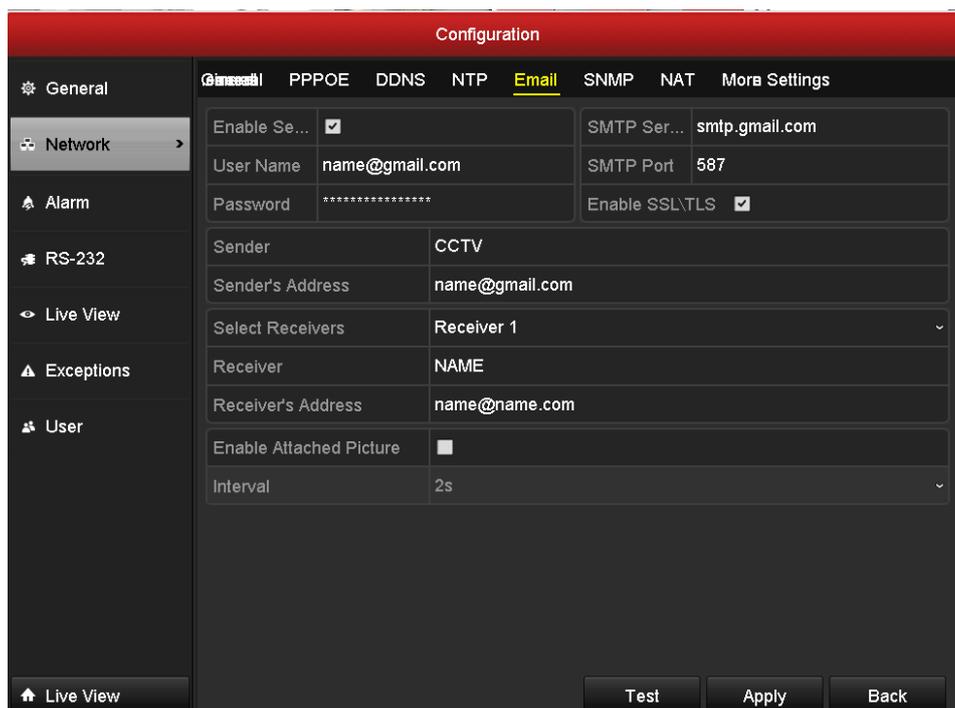

The screenshot shows the 'Configuration' page with the 'Email' tab selected. The left sidebar has 'Network' expanded. The main content area shows the following settings:

General	PPPOE	DDNS	NTP	Email	SNMP	NAT	More Settings
Enable Se...	<input checked="" type="checkbox"/>			SMTP Ser...	smtp.gmail.com		
User Name				SMTP Port	587		
Password				Enable SSL/TSL	<input checked="" type="checkbox"/>		
Sender							
Sender's Address							
Select Receivers				Receiver 1			
Receiver				NAME			
Receiver's Address				name@name.com			
Enable Attached Picture				<input type="checkbox"/>			
Interval				2s			

At the bottom of the page, there are three buttons: 'Test', 'Apply', and 'Back'.

Using GMAIL to send emails from Hikvision™ recorder

Compatible Devices

Turbo DVR FW 3.3.3 and above

E Series NVR FW 3.4.62 and above

I series NVR FW 3.4.62 and above

Netra Platform NVR/DVR Special firmware (<ftp://firmwarepom:download@ftp.hikvision.com/TLS>)